

**10X14MMX10M HOSE REEL (METALLIC) PU REIN FORCED
HOSE W/SWIVEL MALE FITTING**




No.	Parts No.	Description	Q'ty
19	HR041010-19	Wave Spring	1
20	HR041010-20	Spring Housing	1
21	HR0414510-21	Center Spring [For HR0414510]	1
22	HR041010-22	Winder Drum	1
24	HR041010-24	Drum Cover	1
25	HR041010-25	Hook	1
26	HR041010-26	C-Shape Retaining Ring	1
27	HR041010-27	Spring For Hook	1
28	HR041010-28	Nylon Shaft	1
28A	HR041010-28A	Spacer 33X45X3T	1
29	HR041010-29	Seal UN-12.5 PU	1
30	HR041010-30	Washer ID:1/2"x24	1
31	HR041010-31	Swivel Joint	1
32	HR041010-32	Nut	1
33	HR041010-33	Pipe Connection 3/8" PS	1
34	HR041010-34	Mounting Bracket	2
35	HR041010-35	Mounting Handle	1
36	HR0414510-36	Air Inlet PU Braid Hose 10x14x0.5M W/Brass Fitting CH-3/8" PT [Incl. 1A, 1D(2), 37]	1

HR0414510-P-2412F-SH

HR04series HOSE REEL

Installation (安裝方式)

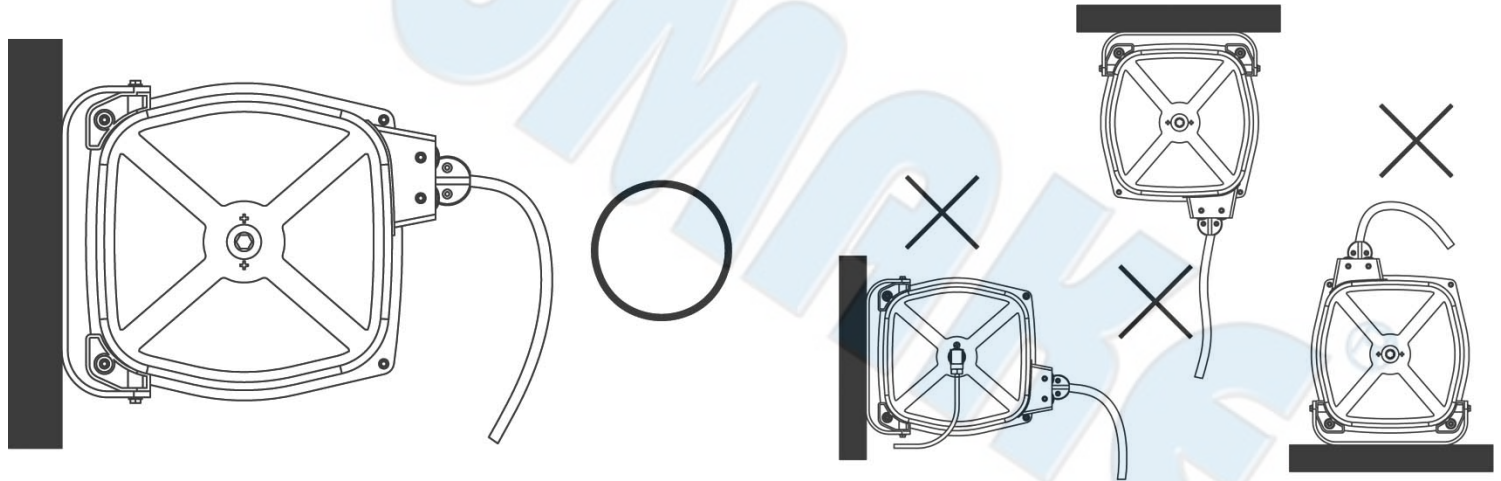

Operation Precaution (使用注意事項)

1. Please pull the hose smoothly operation the hose reel and do not repeat pulling and stop pulling the hose rapidly to prevent the hose kinked.

操作人員使用時，請勿重覆將管子急速拉出，急速停止，防止管子產生扭曲打結現象。

2. Please hold the hose and release it until the stopper touches the rollers during the rewinding.

操作人員使用完畢後，請拉住管子，讓管子自動收回至檔輪球碰觸輪軸後才能將管子放開。

3. The hose will swing wildly and may have the possibility of suffering harm or injury the people around when release the hose directly after use.

操作人員使用完畢後，直接將管子放開，管子會任意甩動，會影響周邊人員安全。

4. The stopper will hit the rollers directly and rollers directly and have a hugh sound when release the hose during the rewinding after use. The will reduce the components service life.

管子放開後，檔輪球直接撞擊滾輪軸會產生巨大聲音，會降低壽命。

