

New Generation

ABRASIVE TOOLS & DUST EXTRACTOR

Efficiency, Energy Saving, Handy Tools for
Fine Body Refinishing Task

ISO 9001



Certificate TW04/02301

New!



SUMAKE®


MAKE JOBS BETTER THAN EVER

New Generation Random Orbital Brushless Electric Sander



Friendly speed control

User friendly speed control design with various speed setting : 4000rpm / 7000rpm / 9000rpm / 10000rpm.



Sealed circuit board

Sealed circuit board locks dust & moisture out.

New!



Brushless DC motor

Outstanding brushless DC motor generates 350W force with high torque. Closed motor design prevents dust-stained for lift extension.



Scan for Pad & Accessories

Height 100.8mm (3.9") low profile

Length 245mm

84mm




Patented dual-channels


Patented dual-channels vacuum design enhance vacuum efficiency.

★ Features- New Cooling System

- New cooling airflow system can less operation temperature over 10°C than current one.
- Cooling system does provide more comfortable operation feeling when long time usage.

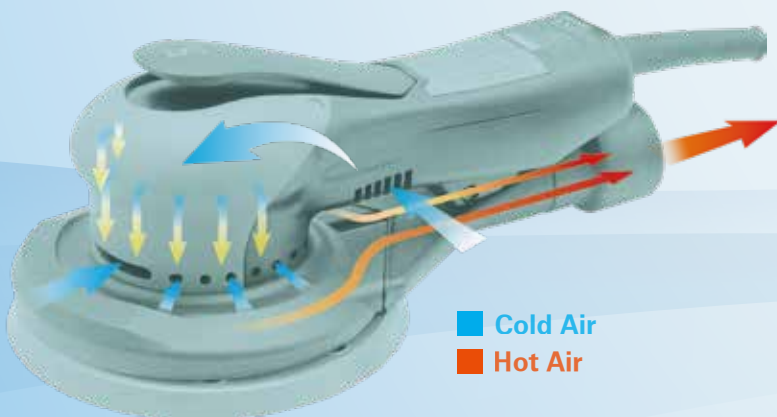


Temperature Test (200W, CV)

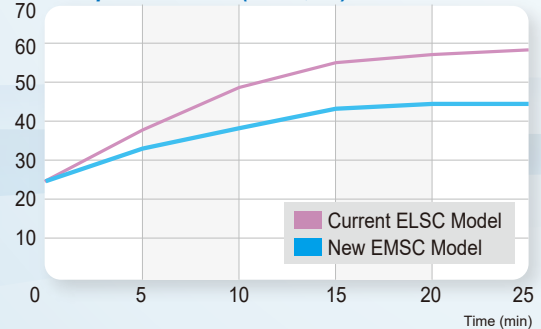

★ Features- Dust Resistant Structure

- The structure is included front plate, bearing, bridging ring, dust-resistant rubber ring.
- The patent dust-resistant design shall enhance bearing lifespan greatly and less repair task and cost.

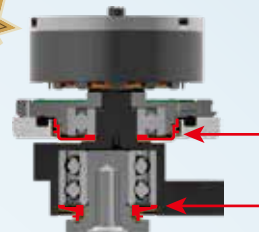


Dust Resistant Structure


★ Features- Dust Collection

Because of new dust-resistant motor & cooling system design, the dust is limited in the blue area and won't get in motor, the bearing lifespan is much extended and sander suction capacity is getting more efficiently.

•New EMSC model

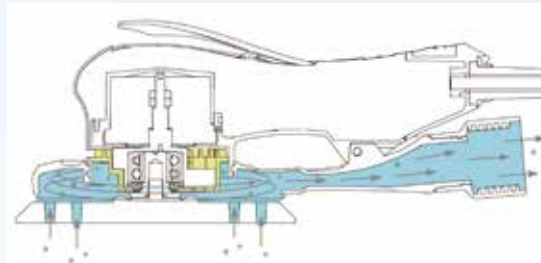

•Current ELSC model

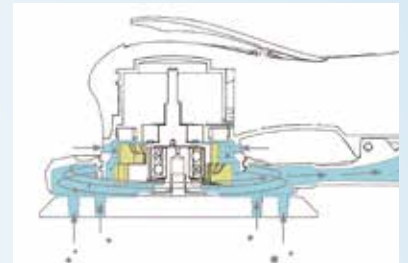

Specification:



Model No.	Sander Type	Orbit		Pad Size		Free Speed (r.p.m)	Motor HP (W)	Versions of Voltage AC-in	Length		Weight	
		inch	mm	inch	mm				mm	inch	kgs	lbs
EMSC-B50HM-2.5	Central Vacuum	3/32	2.5	5	127	4,000	Power:150W Rated/350W Max.	110-120V 220-240V	256	10.0	1.47	3.24
EMSC-B50HM		3/16	5			7,000			256	10.0	1.51	3.34
EMSC-B60HM-2.5		3/32	2.5	6	152	9,000			267	10.5	1.50	3.30
EMSC-B60HM		3/16	5			10,000			267	10.5	1.53	3.37
EMSN-B50H-2.5	Non Vacuum	3/32	2.5	5	127	4,000	Power:150W Rated/350W Max.	110-120V 220-240V	230	9.0	1.41	3.10
EMSN-B50H		3/16	5			7,000			230	9.0	1.43	3.15
EMSN-B60H-2.5		3/32	2.5	6	152	9,000			241	9.48	1.46	3.21
EMSN-B60H		3/16	5			10,000			241	9.48	1.43	3.15

10.8V Cordless Orbital Sander / Polisher

Features:

- Light, nimble and ergonomic.
- Ideal tool for small surface polishing jobs.



Battery power level display

Push “-” button 3 seconds , the light bar right side will flash red and show battery volume .



* For spot-area surface repairing purpose.

BRP12V-30H-30 72mm / 3"

10.8V Cordless Rotary Polisher
1,600-2,200 rpm

BOP12V-30H-30 72mm / 3"

10.8V Cordless Random Orbital Polisher
4,000-7,000 rpm



BOS12V-10V-30 32mm / 1-1/4"

10.8V Cordless Orbital Sander
4,000-8,000 rpm

DC Brushless Motor 36L Dust Extractor

Features:

- DC brushless motor dust extractor for long lifespan.
- Patent waiting - stackable storage design for economic transportation.
- Tool box attachable , convenient design for user to storage stuffs.

New!

Speed operations

5 speed variations with LED indicator

Electric Sander

Air Sander

VC36M2

Vacuum Cleaner

Silent PU casters



DC brushless motor

- Increase lifespan
- Quiet operation

Air flow

- 3000L/ min (106CFM)

Cable

- Length: 5m (16.4 ft.)

Tool box (Option)

Accessories



Hose swivel coupling
Ø19mm(3/4") to
Ø38mm(1-1/2")



Hose swivel coupling
Ø26mm(1") to
Ø38mm(1-1/2")




Hose swivel coupling
Ø26mm(1") Dual channel



Anti-static hose
• ID 38mm(1-1/2") x 4M(13.12 ft.)
• ID 26mm(1") x 5M(16.4 ft.)



Non-woven dust bag
29L (7 gal.)



Dust class HEPA
H13(99.95%)

Specification

Model No.	Motor W (HP)	Voltage (V)	Dust class HEPA	Air Flow CFM (LPM)	Motor Suction Power mm / H ² O (in./H ² O)	Tank Capacity L(Gal.)	Dust Bag Capacity L(Gal.)	Conductive Hose	Cable Length	Net Weight		Dimension LxWxH mm(inch)
										kg	lbs	
VC36M1	1000 (1.34)	110-120	H13 99.95%	106 (3000)	3000(118.1)	36 (8.0)	Non-Woven: 29 (6.38)	ID 1-1/2 in. (38mm) x 413.12ft (4M)	5m (16.4 ft.)	13.7	30.2	475 X 415 X 703 (18.7 x 16.34 x 27.7)
VC36M2		220-240										

SUMAKE Industrial Co., Ltd.

4F, No.351, Yangguang St., Neihs District, Taipei, Taiwan, Zip:114-91

Tel: 886-2-2659-3500 Fax: 886-2-2659-3700 http: //www.sumake.com e-mail: sales@sumake.com.tw

