

Safety Swing Coupler (Nitto Type)

Labor-Saving. Safety.

SUMAKE
MAKE JOBS BETTER THAN EVER



Application

Ideal for industrial pneumatic systems, automotive maintenance, construction sites, and aerospace engineering.

Feature

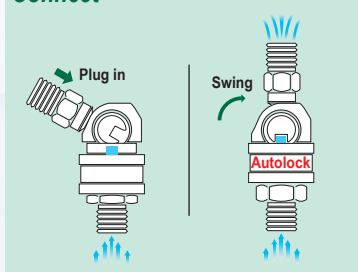
- Effortless connection without any resistance.
- Simultaneous exhaust during disconnection prevents dangerous hose whip.
- The design without an air intake valve allows for smooth and high-volume airflow.
- Built-in locking mechanism prevent accidental disconnection.
- Comforms to JIS B 0203 safety standards.

Specification


- Material: Steel / Zinc alloy
- Working Pressure: 15kgf/cm²
- Max. Pressure: 20kgf/cm²
- Temp Range: -20~+80°C





Instruction

Connect



Remove

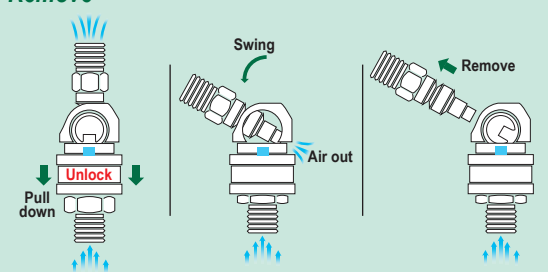

NC82	ITEM	THREAD	SIZE	Unit:mm
● M 	NC82-20M	1/4" male PT	 	1/4" 3/8" 1/2"
	NC82-30M	3/8" male PT		
	NC82-40M	1/2" male PT		
● F 	NC82-20F	1/4" Female PT	 	1/4" 3/8" 1/2"
	NC82-30F	3/8" Female PT		
	NC82-40F	1/2" Female PT		
● H 	NC82-20H	1/4" Hose	 	7.4 9 11.3 15
	NC82-25H	5/16" Hose		
	NC82-30H	3/8" Hose		
	NC82-40H	1/2" Hose		
● P 	NC82-20P	5x8mm Hose	 	5x8 6.5x10 8x12 14 15 19
	NC82-30P	6.5x10mm Hose		
	NC82-40P	8x12mm Hose		

SUMAKE Industrial Co., Ltd.

4F, No.351, Yangguang St., Neihu District, Taipei, Taiwan, Zip:114-91

Tel: 886-2-2659-3500

http://www.sumake.com

Fax: 886-2-2659-3700

e-mail: sales@sumake.com.tw



Certificate TW04/02301



XPST-QC25-0430