

Air Ratchet Hi-Lok Wrench

SUMAKE
MAKE JOBS BETTER THAN EVER

Engineered for Aerospace. Durability.



Application

Ideal for easily and quickly installation of large numbers of Hi-Lok® fasteners.



Durable gear system

Full gear-covered for increased life.

Spring-loaded hex tip holder

Secures the fastener during non-interference assembly.



High precision Motor

Ensures reliable performance in demanding applications.



20-degree ratchet head design

Provides versatility for use in different work environments and angles.

ST-HL613R018

Compatible with various Hi-Lok® tip and socket sizes (sold separately)







Hi-Lok® tip and socket



ST-HL603R018

Application diagram

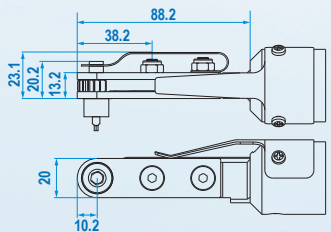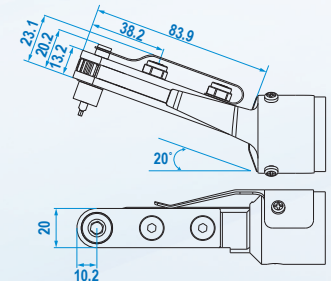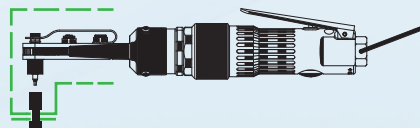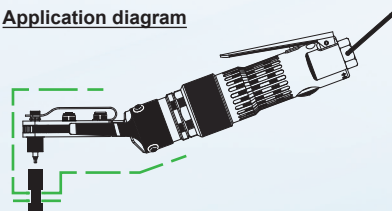

UNIT : (mm)

Specification:

★ Recommend Air Pressure 6.2 bar (90psi)

Model No.	Motor (HP)	Hex Size		Free Speed (rpm)	Max. Torque		Overall Length		Air Inlet (PT)	Air Hose (I.D.)	Air Consumption		Net Weight	
		mm	in		Nm	ft-lb	mm	in			l/min	cfm	kgs	lbs
ST-HL603R018	0.35	7	9/32	180	10	7	285	11-2/9	1/4"	3/8"	396	14	1.28	2.82
ST-HL613R018	0.35	7	9/32	180	10	7	281	11	1/4"	3/8"	396	14	1.28	2.82

SUMAKE Industrial Co., Ltd.

4F, No.351, Yangguang St., Neihu District, Taipei, Taiwan, Zip:114-91

Tel: 886-2-2659-3500

http://www.sumake.com

Fax: 886-2-2659-3700

e-mail: sales@sumake.com.tw



Certificate TW04/02301



XPST-W26-0223