



SUMAKE PNEUMATIC TOOLS



Spray Gun SS-1180S

Specification:

Free Type	Pressure
Standard Nozzle	1.0mm
Option Nozzle	1.8mm, 2.0mm
Air Consumption	7-12 CFM (200-340 L/min)
Air Inlet (NPS)	1/4" (6.35 mm)
Air Hose (NPS)	3/8" (10 mm)
Air Pressure	30-70psi (2.1-5 kg/cm ²) (2.1-5Bar)
Net Weight	2.4 lbs (1.1 kg)

Noise and Vibration:

Vibration	Noise	Remark
0.3 m/s ² Uncertainty K= 1.5 m/s ²	Sound Pressure Level : 72 dB(A)	Please always wear ear protector at environment noise level > 80 dB(A) due to risk of impaired hearing!
	Sound power level : 83 dB(A)	
	Uncertainty K= 3dB	

SUMAKE INDUSTRIAL CO., LTD

4F,NO.351,Yanguang St.,Neihu District TAIPEI, TAIWAN, ZIP:114-91

SS-1180S-S-1507C-GWF



EC DECLARATION OF CONFORMITY

We: **SUMAKE INDUSTRIAL CO., LTD.**

4F, No. 351, Yangguang St., Neihu District, Taipei City, Taiwan

declare in sole responsibility that the equipment

Equipment : **AIR SPRAY GUN**

Model/ Serial No. : **SS-1180S**

to which this declaration applies, complies with these normative documents:

- Machinery Directive: 2006/42/EC

and conforms to the following EN standard,

- EN ISO 12100: 2010
- EN 1953:2013

Name and Signature/Position

Mike Su – Managing Director

Date and Place

2014/9/15

Taipei, Taiwan

SS-1180-D-1507D-GWF

OPERATING MANUAL

ITEM NO.: SS-1180

2-1/4 GALLONS PAINT TANK WITH SPRAY GUN & HOSE

Description

Read Instructions Carefully before using

2-1/4" gallon pressure tank provides pressurized material up to a maximum of 80psi. This tank is equipped with an air regulator, gauge, safety valve, and fluid outlet. It is constructed of only the finest materials for durability. The 2-1/4" gallon capacity enables you to handle most any job with professional results. This versatile tank can also spray materials other than paint.

Caution

This pressure tank is not designed for highly abrasive, corrosive, or rest inducing materials. If used with such materials, frequent and thorough cleaning is advised to reduce the necessity for replacement of parts.

Warning


Air pressure loads that are higher than design loads, or alterations to the pressure feed tank can result in tank rupture or explosion.


- A safety valve protects the tank for over pressurization. During each use, pull the ring on the safety valve to check if it operates freely and relieves air pressure. If the valve is stuck, does not operate freely, or does not relieve air pressure, it must be replaced. Do not discard or make any alterations or substitutions to this valve.
- Do not make any changes to the air tank. Tampering in the form of drilling, welding etc... will weaken the tank.
- The maximum operating pressure of the tank is 80psi.

Installation

Follow the manufacturer's directions for the mixing and preparation of material. Strain material using a fine mesh screen in order to prevent the entry of foreign matter and the clogging of passageways.

1. Always relieve all air pressure in the tank. Pull the ring on safety valve until pressure bleeds down
2. Loosen thumb screws, tip lid clamps back and remove lid assembly.
3. Pour material into the tank.
4. Replace the lid assembly and tighten clamps and thumb screws securely.
5. It is best for the air supply line to pass through a trans-former to filter dirt from air and remove entrained water and oil. Connect the air supply hose to the air inlet fitting on tank regulator.
6. Attach the atomization air hose to the air outlet fitting which is directly opposite air inlet fitting.
7. Connect material hose to the fluid outlet fitting.
8. Refer to figure below for a typical assembly.

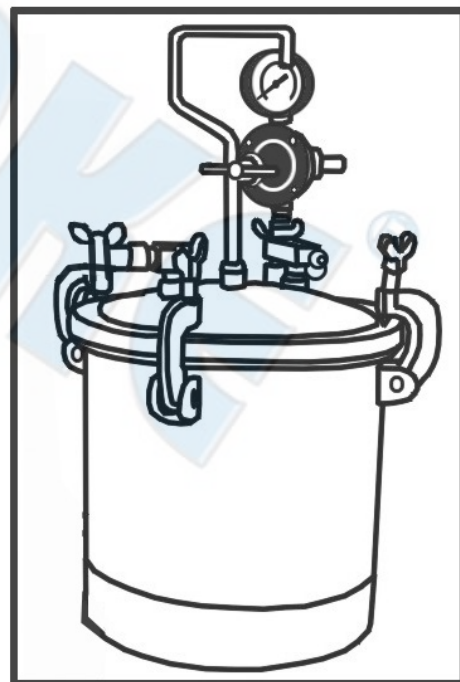

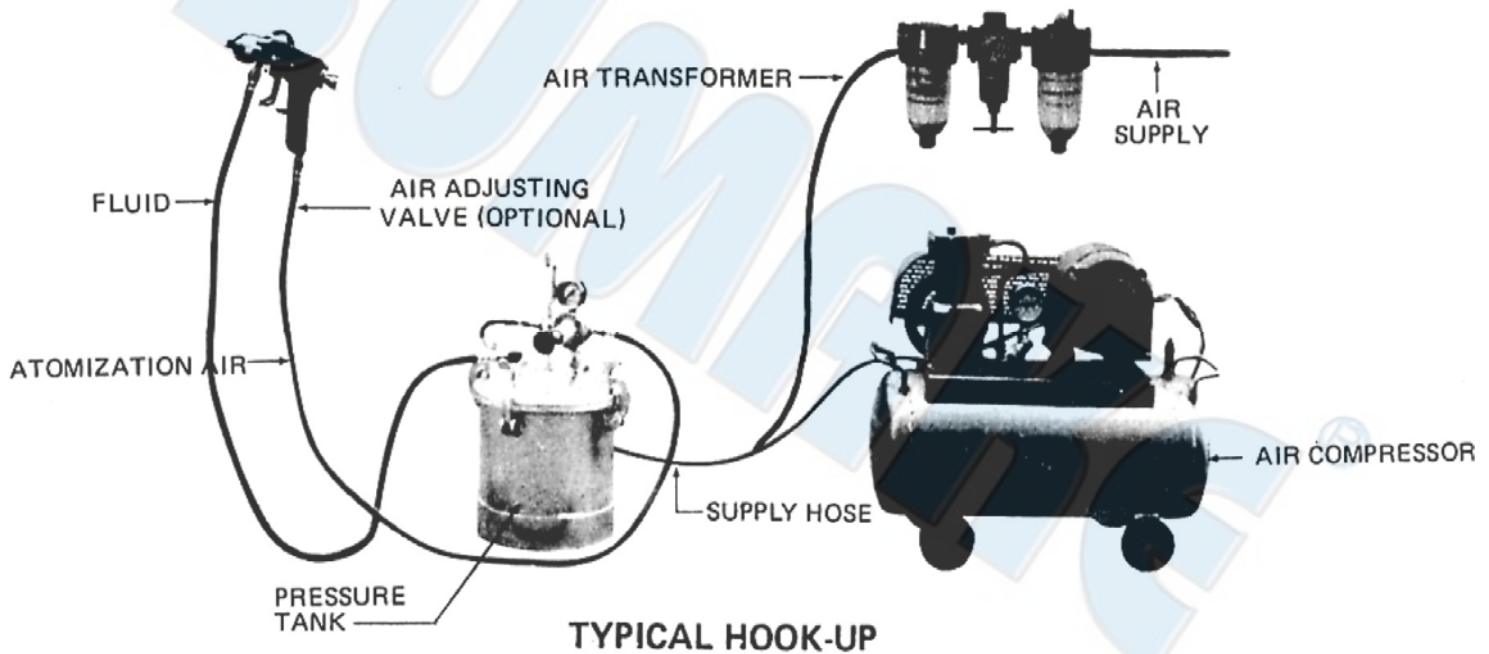

MAINTENANCE: CLEANING EQUIPMENT

1. Turn off the main air supply to the tank.
2. Relieve all pressure from the tank by pulling the ring on safety valve until the pressure bleeds down
3. Turn T-handle adjusting screw on tank regulator counterclockwise until no spring tension is felt.
4. Loosen thumb screws, tip clamps back and tip tank lid to on side.
5. Loosen spray gun air cap retaining ring about three turns.
6. Turn on the air supply.
7. Cup cloth over air cap on the gun and pull trigger. This will force material back through the hose, into the tank.
8. Empty and clean tank and parts which come in contact with material. Use a suitable solvent.
9. Pour solvent into the tank.
10. Replace lid and tighten thumb screws and clamps.
11. Spray until clean solvent appears.
12. Repeat steps 4-7

Note: keep the safety valve clean at all time.

Trouble shooting chart

Problem	Cause	Remedy
Air escaping from port on regulator cap.	Broken or damaged diaphragm.	Replace diaphragm.
Pressure creepage registered on gauge.	Dirty or worn valve seat in regulator	Clean or replace valve seat.
Material tends to settle out rapidly.	Not enough agitation of material.	Increase agitation.
Fluid or air leak at lid gasket.	Defective lid gasket or thumb screw not tight	Replace or tighten

Note: check gauge occasionally. The position of the needle should return to zero with no pressure on the gauge.

ACCESSORY ITEMS

Air regulator kit:

For use when independent and accurate pressure control of both air and fluid is necessary. Used with portable air compressors or with air lines when no other means. (air transformers or regulator) of air pressure regulator is available.

Air adjusting valve

Lets operator control and reduce air usage at the gun. Ideal for low pressure spraying.

Lid gasket-rubber.

For use when material being sprayed are not compatible with Thiokol gasket.


Intake strainer

Connects to fluid inlet tube, prevents lumps and foreign matter from entering fluid lines.



SS-1170(S)
SS-1180(S)

SPRAY GUN
SPRAY GUN

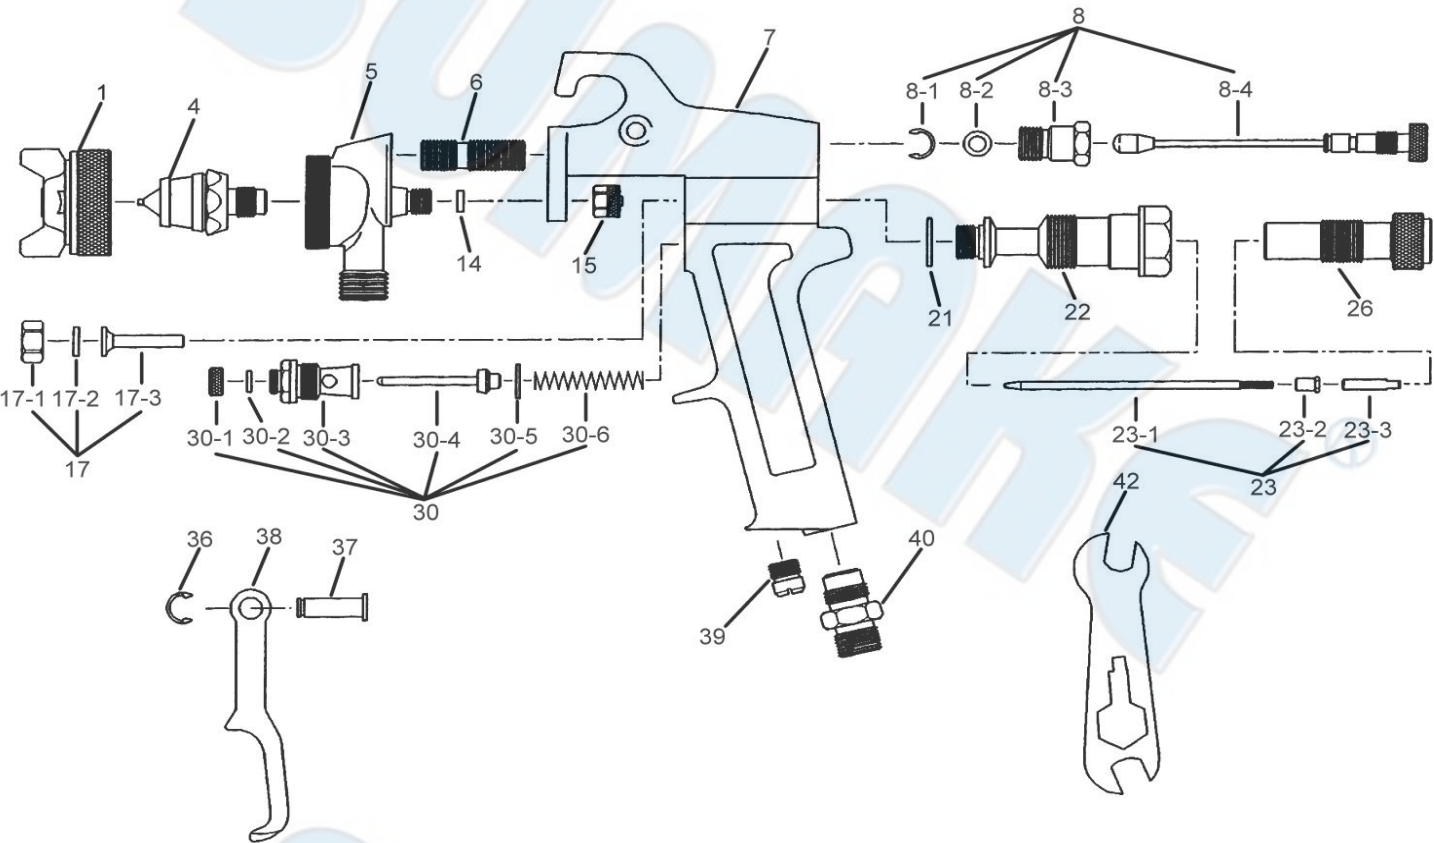

PARTS LIST

No.	Parts No.	Description	Q'ty
1	1170S-01	Air Nozzle W/Brass Cap	1
4	1170S-04	Fluid Nozzle -1.0	1
	1170S-04A	Fluid Nozzle -1.8	1
	1170S-04B	Fluid Nozzle -2.0	1
	1170S-04C	Fluid Nozzle -2.5	1
5	1170S-05	Head	1
6	1170S-06	Screw	1
7	1170S-07	Gun Body	1
8	1170S-08	Air Regutafor	1
14	1170S-14	Cow Hide Washer	1
15	1170S-15	Pocking Nut	1
17	1170S-17	Needle Valve Sleeve	1
21	1170S-21	Gasket	1

No.	Parts No.	Description	Q'ty
22	1170S-22	Housing	1
23	1170S-23	Paint Needle Complete -1.0	1
	1170S-23A	Paint Needle Complete -1.8	1
	1170S-23B	Paint Needle Complete -2.0	1
	1170S-23C	Paint Needle Complete -2.5	1
26	1170S-26	Fluid Control Assembly	1
30	1170S-30	Air Valve	1
36	1170S-36	Screw	1
37	1170S-37	Stud	1
38	1170S-38	Trigger	1
39	1170S-39	Screw	1
40	1170S-40	Air Connection	1
42	1170S-42	Spanner	1



Read all these safety instructions before operating this product and save these instructions.

The tool has been manufactured in conformity with the instruction of EU machine directive. The EU mark will be considered void in the event of inexpert repairs, the use of non-original parts and in case of non-observance of the safety instructions in the user's manual.

Possible direct or indirect consequential damages are not the responsibility of SUMAKE Industrial co., Ltd.

General safety rules:

1. Watch the tool at all times when in use.
2. People under the influence of alcohol or drugs are not allowed to use, repair or maintain the tool.
3. Keep unqualified persons, children, etc. away from the tool.
4. Keep work area clean and with sufficient daylight or artificial lighting. The work area on which the machine is used must be cleaned up. Disorder is a potential cause of accidents.
5. Danger of explosion. Never use oxygen and combustible gas as an air supply for the tool which may be ignited by spark and cause fire or explosion.
6. Never use gasoline or other flammable liquids to clean the tool.
7. Do not use air tools in potentially explosive atmospheres such as in the presence of flammable liquids, cleaning solvents, fluid energy or stored gases.
8. Do not expose air tools to rain. Do not use air tools in damp or wet locations.
9. When a fault or failure is detected, the tool must immediately be disconnected from the air supply and returned for repair.
10. It is not permitted to modify the tool in any way.
11. When not in use, keep tools in a dry place, either locked up or in a high place, out of the reach of children.
12. Do not force small air tools to do the job of a heavy –duty task. Do not use air tool for purpose of which was not intended.
13. Wear suitable ear protection at environment noise level >80dB(A) and safety spectacles when using the tool. Always wear approved safety goggles if work in dusty. This also applies to other persons in the nearby vicinity.
14. Do not wear loose clothing or jewelry. They can be caught in moving parts. Rubber gloves and non-skid foot wear are recommended when working outdoors. Wear protective hair covering to contain long hair.
15. Keep proper footing and balance at all times.
16. Use clamps or a vice to hold work-piece. It is safer than using your hand and free both hands to operate the air tool.
17. When not use, before performing service or changing accessories, please disconnect tool from air compressor.
18. Do not carry plugged in air tool with your finger on the switch trigger. Be sure switch is in the "OFF" position when connecting to air supply.
19. Watch what you are doing. Use common sense, even unsafe situation or unbalanced positions, particularly when you are tired.
20. Air powered tools can vibrate in use. Vibration, repetitive motions or uncomfortable positions may be harmful to your hands or arms. Stop using any tool if discomfort, tingling feeling or pain occurs. Seek medical advice before resuming use.
21. Multiple hazards. Read and understand the safety instructions before installing, operating, repairing, maintaining, changing accessories on, or working near the tool. Failure to do so can result in serious bodily injury.
22. Only qualified and trained operators should install, adjust or use the tool.
23. Do not modify the tool. Modifications may reduce the effectiveness of safety measures and increase the risks to the operator.
24. Do not discard the safety instructions – give them to the operator.
25. Do not use the tool if it has been damaged.
26. Tools shall be inspected periodically to verify the ratings and markings required by this document are legibly marked on the tool. The employer/user shall contact the manufacturer to obtain replacement marking labels when necessary.

Safety precautions for projectile hazards

1. Disconnect the tool from the energy source when changing inserted tool or accessories.
2. Failure of the accessories may generate high velocity projectiles.
3. Always wear impact-resistant eye protection during operation of the tool. The grade of protection required should be assessed for each use.
4. The risks to others should also be assessed at this time.
5. Ensure that the work piece is securely fixed.

Safety precautions for operating hazards

1. Use of the tool may expose the operator's hands to hazards including crushing, impacts, cuts and abrasions and heat. Wear suitable gloves to protect hands.
2. Operators and maintenance personnel must be physically able to handle the bulk, weight and power of the tool.
3. Hold the tool correctly: be ready to counteract normal or sudden movements – have both hands available.
4. Maintain a balanced body position and secure footing.
5. Release the start and stop device in the case of an interruption of the energy supply.
6. Use only lubricants recommended by the manufacturer.
7. That unsuitable postures may not allow counteracting of normal or unexpected movement of the tool.
8. If the tool is fixed to suspension device make sure that the fixation is secure.

Safety precautions for repetitive motions hazards

1. When using the tool, the operator may experience discomfort in the hands, arms, shoulders, neck, or other parts of the body.
2. While using the tool, the operator should adopt a comfortable posture. Maintain secure footing and avoid awkward or off-balanced postures. The operator should change the posture during extended tasks which may help avoid discomfort and fatigue.
3. If the operator experience symptoms such as persistent or recurring discomfort, pain, throbbing, aching, tingling, numbness, burning sensation or stiffness, these warning signs should not be ignored. The operator should tell the employer and consult a qualified health professional.

Safety precautions for accessory hazards

1. Disconnect power tool from energy supply before changing the accessory.
2. Only use sizes and types of accessories and consumables that are recommended by the tool manufacturer.

Safety precautions for workplace hazards

1. Slips, trips and falls are major causes of workplace injury. Be aware of slippery surfaces caused by use of the tool and also of trip hazards caused by the air line.
2. Proceed with care in unfamiliar surroundings. Hidden hazards may exist, such as electricity or other utility lines.
3. The tool is not intended for use in potentially explosive atmospheres and is not insulated from coming into contact with electric power.
4. Make sure there are no electrical cables, gas pipes etc. that could cause a hazard if damaged by use of the tool.

Safety precautions for dust and fume hazards

1. Dusts and fumes generated when using the tool can cause ill health (for example: cancer, birth defects, asthma and/or dermatitis); risk assessment of these hazards and implementation of appropriate controls of is essential.
2. Risk assessment should include dust created by the use of the tool and the potential for disturbing existing dust.
3. Operate and maintain the power tool as recommended in these instructions, to minimise dust or fume emissions.
4. Direct the exhaust so as to minimise disturbance of dust in a dust filled environment
5. Where dusts or fumes are created, the priority shall be to control them at the point of emission.
6. All integral features or accessories for the collection, extraction or suppression of airborne dust or fumes should be correctly used and maintained in accordance with the manufacturer's instructions.
7. Use respiratory protection as instructed by your employer or as required by occupational health and safety regulations.

Safety precautions for noise hazards

1. Unprotected exposure to high noise levels can cause permanent, disabling, hearing loss and other problems such as tinnitus (ringing, buzzing, whistling or humming in the ears).
2. Risk assessment of these hazards and implementation of appropriate controls of is essential.
3. Appropriate controls to reduce the risk may include actions such as damping materials to prevent work pieces from 'ringing'.
4. Use hearing protection as instructed by your employer or as required by occupational health and safety regulations.
5. Operate and maintain the power tool as recommended in these instructions, to prevent an unnecessary increase in noise.
6. If the tool has a silencer, always ensure it is in place and in good working order when the tool is operating.
7. Select, maintain and replace the consumable/inserted tool as recommended in these instructions, to prevent an unnecessary increase in noise.

Safety precautions for vibration hazards

1. Exposure to vibration can cause disabling damage to the nerves and blood supply of the hands and arms.
2. Wear warm clothing when working in cold conditions and keep your hands warm and dry.
3. If you experience numbness, tingling, pain or whitening of the skin in your fingers or hands, stop using the assembly power tool for non-threaded mechanical fasteners, tell your employer and consult a physician.
4. Support the weight of the tool in a stand, tensioner or balancer, because the operator can then use a lighter grip to support the tool.


Additional safety instructions for pneumatic power tools

1. Always shut off air supply, drain hose of air pressure and disconnect tool from air supply when not in use, before changing accessories or when making repairs.
2. Never direct spraying air or liquid at yourself or anyone else.
3. Whipping hoses can cause severe injury. Always check for damaged or loose hoses and fittings.
4. Cold air shall be directed away from the hands.
5. Whenever universal twist couplings (claw couplings) are used, lock pins shall be installed and whipcheck safety cables shall be used to safeguard against possible hose-to-tool and hose-and-hose connection failure.
6. Do not exceed the maximum air pressure stated on the tool.
7. Never carry an air tool by the hose.

Specific safety instructions

Warnings shall be given about any specific or unusual hazards associated with the use of the power tool. Such warnings shall indicate the nature of the hazard, the risk of injury and the avoidance action to take.

General preparation and connection:

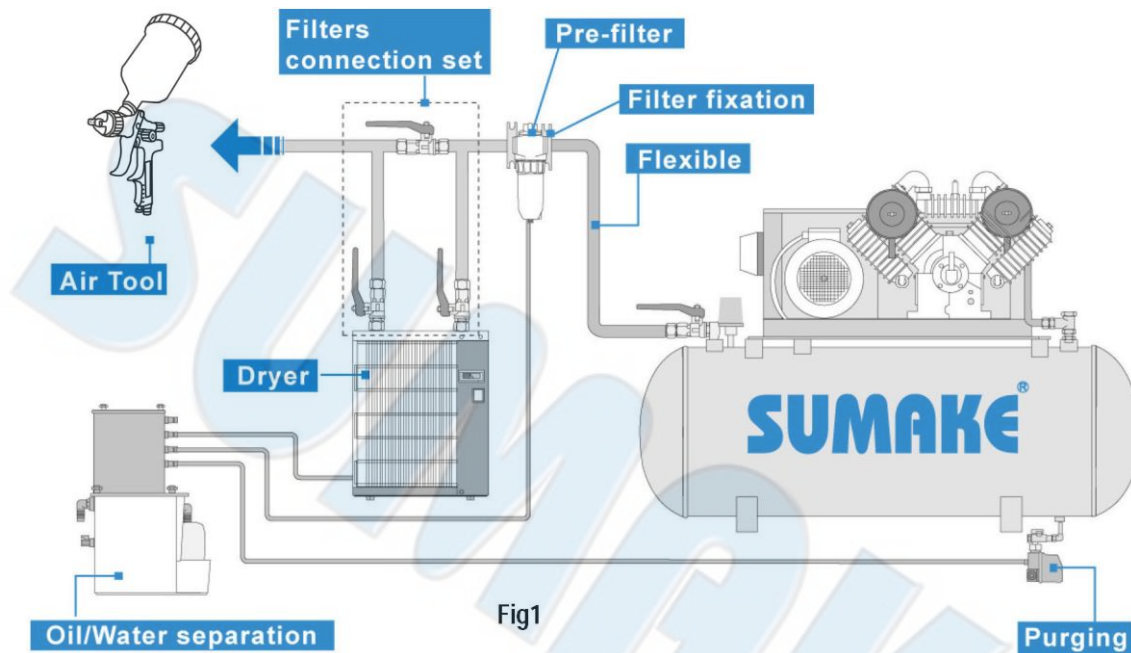

1. Before connecting the air hose, apply 4 to 5 drops of SAE#10-20 spindle oil at the air inlet. Also, every 3 to 4 hours of operation, oiling is necessary. Twist Teflon thread tape to ensure a proper seal air inlet. Then tighten the air coupler into air tool.
2. The supplied compressed air must be clean and dry, with the appropriate oil mist. Use an air treatment unit; filter, regulator and lubricator.
3. Please refer Fig.1 illustration shows the correct mode of connection to the air supply system which will increase the efficiency and useful life of the tool.
4. The quick connect coupling and hose must have sufficient air flow capacity. We recommend an air hose with a diameter of 10mm (3/8").
5. To ensure a good performance. The operation pressure at the compressed air inlet please refer specification indication. Higher operating pressures may cause damaged or excessive wear. Operating pressures below 5.3bar may cause pressure or power loss.



Risk of injury

1. Compressed air can inflict serious injuries. Therefore never point the air hose at another person or yourself.
2. Shut – off the air supply and disconnect the tool in case:
 - You want to change or replace accessories.
 - You want to clean, repair or maintain the tool.
 - The tool is not going to use for some times.
3. Check compressed air hose before use. If it is damaged, broken, torn, or deformed, the hose is not to be connected to the tool.
4. Always check the pneumatic couplings before using the tool. If they show signs of damage, fracture, cracking or excessive corrosion, the respective tool or the air hose is not to be used.
5. Use only qualified adapters and connectors, In case of wear they are to be replaced immediately.
6. Only use air pipes that are fit for the use at maximum pressure.

Maintenance instruction:

1. Dry the filter (fig1) and the air inlet of the tool.
2. Lubricate the quick connect coupling to prevent blocking.
3. Air tool require lubrication throughout the life of the tool. The air motor and bearing uses compressed air to start the tool. The moisture in compressed air will rust the air motor; you must lubricate the motor daily.
4. Avoid storing the tool in a location subject to high humidity. If the tool is left as it is used, the residual moisture inside the tool can cause rust.
5. Before storage, lubricate tool and run it for a few seconds.
6. Regular inspection of spindles, threads, and clamping devices in respect of wear and tolerances for location of abrasive products.
7. If the tool is too seriously damage to be used anymore, recycle raw material instead of disposing as waste. The machine, accessories and packaging should be sorted for environmental-friendly recycling. Check with your local authority or retailer for recycling advice.



NOTE

SUMAKE®

SUMAKE®

NOTE

SUMAKE®

SUMAKE®