

# Auto Shut Off Air Angle Wrench

*High Torque. High Accuracy. Durability.*



## Application

Ideal for industrial assembly where preset torque control and auto shut-off deliver precise and repeatable results.



### Internal adjustable torque setting

Prevent unintended torque changes while ensuring repeatable and precise tightening.



### Forward and Reverse rotary knob design

The steel ball positioning system verifies the correct position and prevents accidental activation.



### Easy-to-use side lever design

Ensures precise control.

### Compact and robust angle head

Allows easy access to tight spaces and ensures long lifetime.





### High performance motor

Powerful motor design improves work efficiency.

### High precision clutch

Suitable for tightening both soft and hard joints with a repeatability of  $\pm 3\%$ .

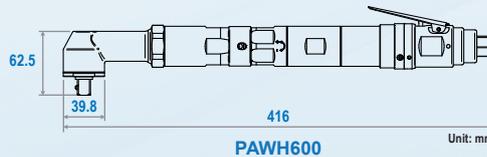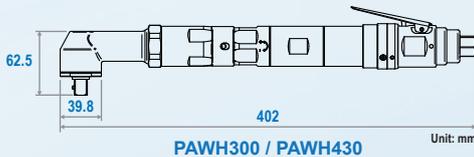

## Specification:

★ Recommend Air Pressure 6.2 bar (90psi)

Model No.	Square Drive (inch)	Capacity Bolt Size (mm)	Free Speed (r.p.m)	Torque Range $\pm 3\%$		Overall Length		Air Inlet (PT)	Air Hose (I.D.)	Air Consumption		Net Weight	
				Nm	ft-lbs	mm	in			l/min	cfm	kg	lbs
PAWH300	1/2	M8	450	17-30	12.54-22.13	402	15.83	1/4"	3/8"	650	23	2.21	4.87
PAWH430	1/2	M8-M10	280	28-43	20.65-31.72	402	15.83	1/4"	3/8"	650	23	2.21	4.87
PAWH600	1/2	M10	80	33-60	24.34-44.25	416	16.38	1/4"	3/8"	650	23	2.3	5.06

## SUMAKE Industrial Co., Ltd.

4F, No.351, Yangguang St., Neihu District, Taipei, Taiwan, Zip:114-91

Tel: 886-2-2659-3500

http://www.sumake.com

Fax: 886-2-2659-3700

e-mail: sales@sumake.com.tw



Certificate TW04/02301



XPST-W25-1226